


CQDH14-850
Scissor Stacker

Load Curve

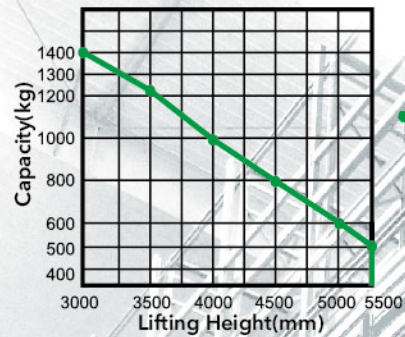

Configuration and performance

- Electronic power steering system, light and low noise.
- Two-way magnetic valve, three drop speed mode.
- AC Driving system, No carbon brush, maintenance free.
- Electromagnetic, regenerative braking system.
- Lifting, reach, regenerative limit, motor and battery life extension.
- Equipped with double oil cylinder, fork tilt more smoothly.
- Standard moon walk. Handle at any angle, the vehicle goes straight.

Safety

- Curve automatic deceleration devices, more safe.
- Stepless speed control system, safe and quiet.
- Controller with Multiple automatic protection.
- Emergency reversing device/Emergency brake switch.
- High position automatic reduction device.

Option

- Lithium battery




AC | EPS | Moon Walk
Down mode at 3 speeds

Type	Lift height (mm)	Outside width between forks (mm)	Inside width between forks (mm)
CQDH14-850	3500/3800/4000/4200/4500/5000/5500	1270/1420/1470	1070/1220/1270

Feature		CQDH14-850	
Model		CQDH14-850	
Type		Reach(Tilt, Side shifter)	
Mast type		Standard 3-Stage	
Load capacity	kg	1400	
Load center	mm	500	
Wheel base	mm	1478	
Operating type		Walkie	
Wheels			
Wheels type		PU	
Wheel quantity/Driving wheel/ Balance wheel/Bearing wheel		1/0/4	
Dimension			
Reach distance	mm	0-550	
Standard lift height	mm	3500/3800/4000/4500/5000/5500	
Max. extend height	mm	4710/5010/5210/5710/6210/6720	
Mast lowered height	mm	1914/2014/2081/2248/2415/2582	
Lowered fork height	mm	55	
Fork size(length/width/thickness)	mm	1070/100/40	
Overall length	mm	2225	
Overall width	mm	1430	
Outside width between forks	mm	200-812	
Distance shift fork side	mm	150	
Tilt of fork(F/B)	mm	4/3	
Min. Turning radius		1566	
Min. Aisle width for pallets 800×1200	km/h	2135	
Min. Aisle width for pallets 1000×1200	mm/s	2315	
Min. ground clearance	mm/s	30	
Performance			
Travel speed, laden/unladen		3.5/4	
Lift speed, laden/unladen	kW	130/150	
Lowering speed, laden/unladen		100/180	
Gradeability, laden/unladen		3/5	
Electrical configuration			
Drive motor/Lift motor/Steering motor		AC1.5/DC4.5/DC0.15	
Brake		Electromagnetic/Regenerative	
Weight			
Battery voltage	V	Lead-acid battery	Lithium battery (Optional)
Battery capacity	Ah	24	24
Controller		345 (Options:FAAM345)	200
Battery weight	kg	ZAPI	ZAPI
Service weight with battery	kg	298	-
		2296	-

* Details of specifications and equipment are based on information available at time of printing and may change without notice.

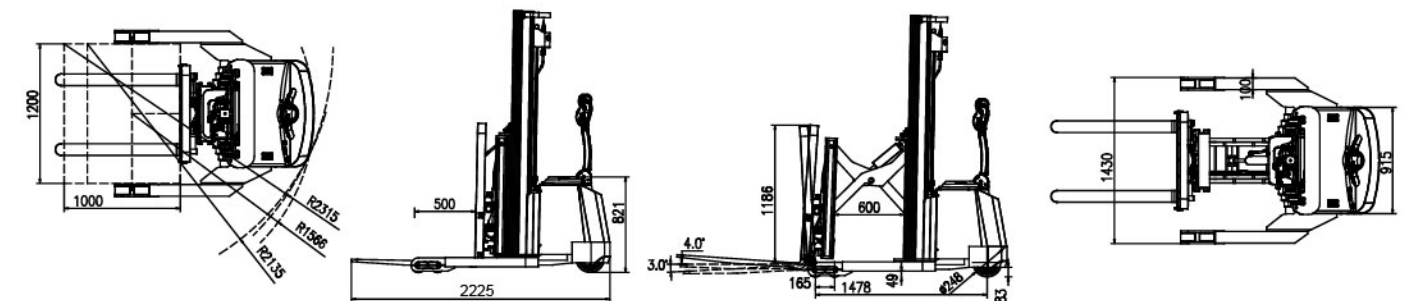

Interlaken Maquinaria S.A. de C.V.
Tel. Corporativo: 55 9035 6953
E-mail: info@interlakenmaq.com
www.helimexico.com